




Drill Press Vices - DV



- Solid structure, main body is made of FC15.
- Heat treated steel jaws with hardness HRC 45°~50°.
- Jaws and handle are surface treated by black oxide finish.
- Front fixed prismatic jaw with V-grooves is designed for clamping round work pieces both vertically & horizontally.

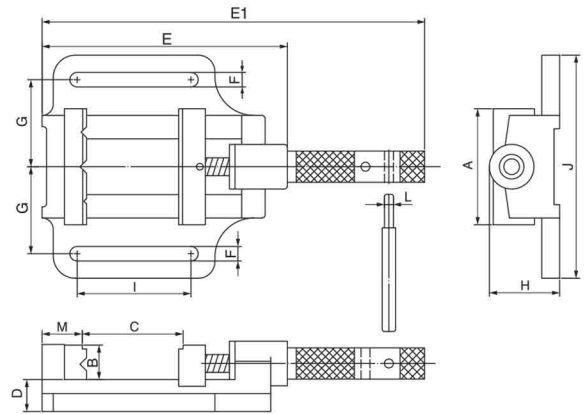


Stock Code	A	B	C	D	E	E1	F	G	H	I	J	L	M
DV-85	84	25	85	27	182	287	12	64	56	80	167	8	32
DV-100	104	31	100	28.5	220	343	13	78	63	102	200	8	36
DV-120	132	38	120	32	250	395	14	91	71	127	226	9.5	45

(mm)




Drill Press Vices - Super Open - VRV

- Large opening.
- Front fixed prismatic jaw with V-grooves is designed for clamping round work pieces both vertically & horizontally.



DESIGN FOR THIN & ROUND WORKPIECE

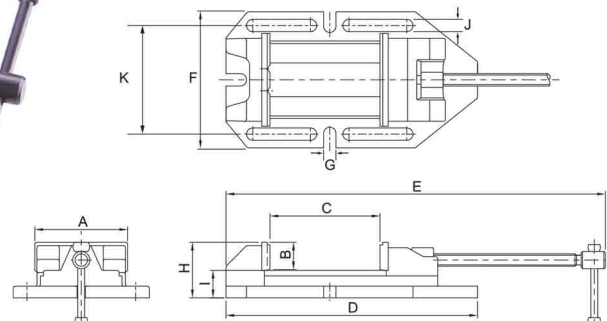

Stock Code	A	B	C	D	E	F	G	H	I	J	K	V	Kgf
VRV-4	110	32	128	316	471	177	16	73	40	16	144	5-32	450
VRV-5	135	40	165	366	552	207	16	81	40	16	168	6-40	650
VRV-6	160	50	218	447	693	227	16	96	45	16	208	7-48	900

(mm)