




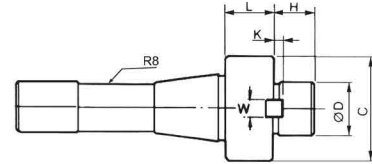

Face Mill Arbors - 3MT, R8 & ISO

- DIN 2080 shank.
- SCM-21 steel.
- Precision ground throughout.
- Hardened HRC 50° - 55°




Optional Accessories:

Face Mill Cutters



PG V034

Inserts




Pg V118 - V121

(mm)


Stock Code	Taper	D	H	W	K	C	L
VF-136-1	3MT	22	16	9.57	7	46	13.5
VF-134	R8	22	18	9.57	5	40	20
VF-135		27	20	12.75	7	53	20
VF-120	30 ISO	22	18	9.57	5	40	20
VF-121		27	20	12.75	7	53	20
VF-122		32	23	15.9	7	63	20
VF-123	40 ISO	22	18	9.57	5	40	20
VF-124		27	20	12.75	7	53	20
VF-125		32	23	15.9	7	63	20
VF-126		40	26	19.05	8	85	20
VF-128	50 ISO	22	18	9.57	5	40	20
VF-129		27	20	12.75	7	53	20
VF-130		32	23	15.9	7	63	20
VF-131		40	26	19.05	8	85	20

MORSE TAPER SCREW TYPE




Morse Taper	0	1	2	3	4	5	6	7
A	50	53.5	64	81	102.5	129.5	182	250
C	9.045	12.065	17.780	23.825	31.267	44.399	63.348	83.058
D	6.104	8.972	14.034	19.107	25.164	36.531	52.399	68.186
T	-	M6	M10	M12	M16	M20	M24	M33

R8 TAPER



A	B	C	D	G
101	24.1	32	4	7/16unf

ISO/NT TAPER



ISO/NT	D1	D2	D3	L	M	S	T
30	17.4	31.7	50.0	48.4	32.4	16.1	M12
40	25.3	44.4	63.0	65.4	45.0	16.1	M16
50	39.6	69.85	97.50	101.80	70.60	25.70	M24